


Stainless Steel LED Dry Fountain Light



PXYH300GMKH

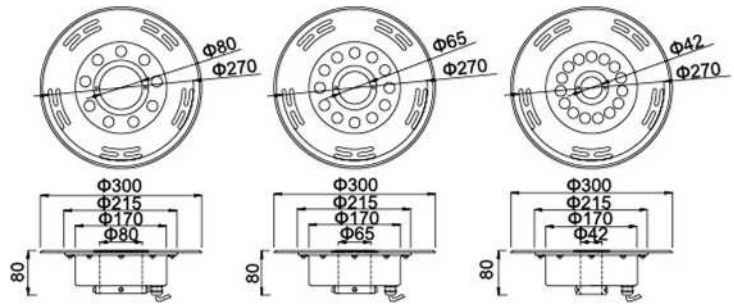

Stainless Steel LED Dry Fountain Light

- Beam Angle: 30° as Standard. 10° . 60° . 90° . 120° Optional
- Colour: R. Y. G. B. W. WW. RGB
- Lifespan: 50,000hrs. L70@ 25t:
- Control method: Single color. Auto RGB color Change. RGB 4 wires color change (With remote). DMX512 control
- Material: 304 stainless Steel, High light transmission tempered glass, Anti-aging silicone sealing ring and with backwater
- Cable: Special underwater waterproof cable 1 meter
- Temperature: Operating temperature -40°C/+45° Storage temperature -40/+70
- Certification: CE. RoHs. ISO9001. IP68
- Waterproof level: IP68

Technical parameters

Electric Parameters

Model	Rated Power	Voltage
PXYH300GMKH-9X1W	9W	AC/DC12V. AC/DC24V AC220V
PXYH300GMKH-12X1W	12W	AC/DC24V. AC220V
PXYH300GMKH-15X1W	15W	AC/DC24V. AC220V
PXYH300GMKH-18X1W	18W	AC/DC24V. AC220V
PXYH300GMKH-9X3W	27W	AC/DC24V. AC220V
PXYH300GMKH-12X3W	36W	AC/DC24V. AC220V
PXYH300GMKH-18X3W	54W	AC/DC24V. AC220V

Physical Parameter

Dimension	Centre Hole	Recommended Cut Out Size	Reference Weight
300*80mm	42mm 50mm 65mm 80mm	270mm	5.5KG